





REVISIONE	DESCRIZIONE	DATA
X	XX	/2019
X	XX	/2019

HLF

H L F S.r.l. si riserva, a termini di legge, la proprietà del presente disegno e ne vieta la riproduzione o la copia, senza sua autorizzazione scritta

PLANNING DIAGRAM

DATA 03/12/2019	DISEGNATORE BERNARDEL L.	SCALA X:X
DESCRIZIONE HLF 2700 PLANNING DIAGRAM (METRIC)	CODICE 9BPM27NG02	REVISIONE 0

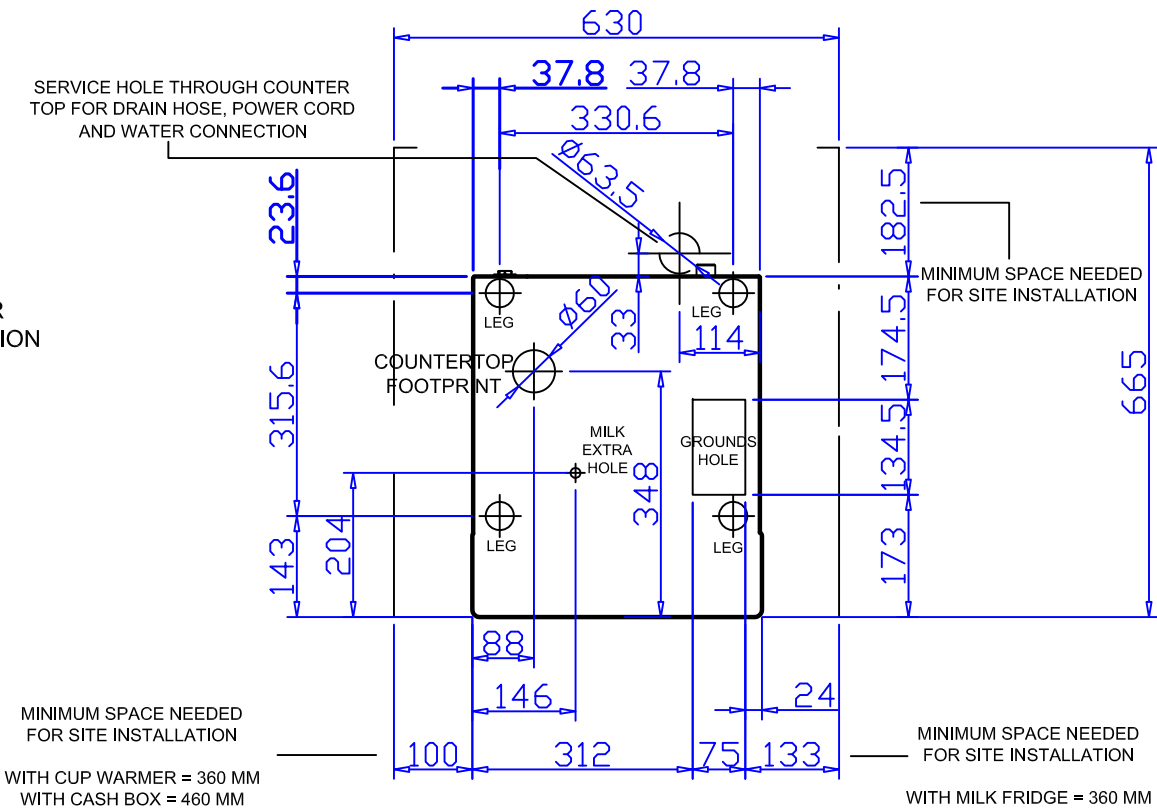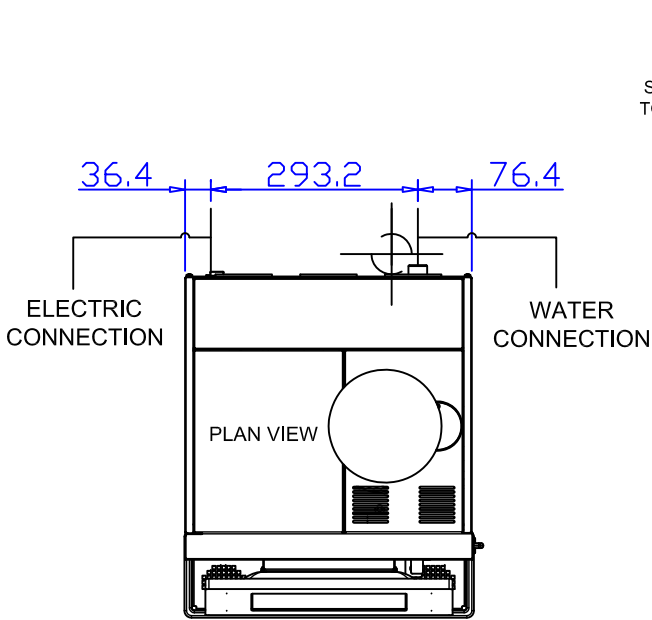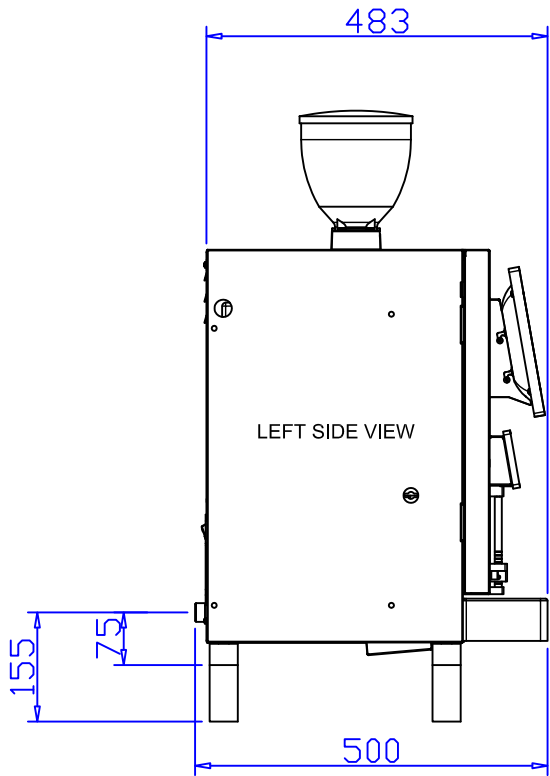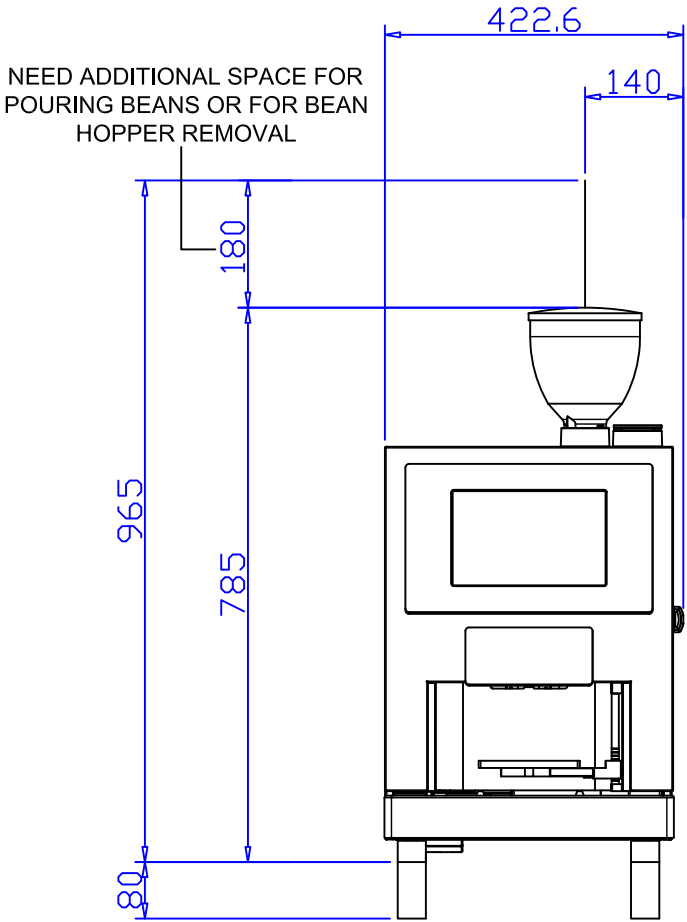

Physical site requirements : model HLF 2700

HEIGHT 1048 mm INCLUDES 110 mm LEGS: IT'S POSSIBLE TO HAVE DIFFERENT LEGS HEIGHT.

Countertop space : 630 mm (Width), 665 mm (Depth), 1048 mm (Height) (Machine Only);

additional 260 mm (Width) with Milk fridge on the right side;
additional 260 mm (Width) with Cup warmer on the left side;
additional 460 mm (Width) with Cash box on the left side;

A DRAIN HOSE ACCESS HOLE IN THE COUNTER TOP MAY BE REQUIRED;

Countertop must be able to support : 50 Kg (Machine Only);
additional 27 Kg with Milk fridge on the right side;
additional 20 Kg with Cup warmer on the left side;
additional 15 Kg with Cash box on the left side;

Power requirements : (FOR EU)
250 V AC, 16 AMP dedicated circuit using a SHUKO receptacle.

(FOR AU)
230 V AC, 10 AMP dedicated circuit using an AS 3112 receptacle.

(FOR US)
125 V AC, 15 AMP dedicated circuit using a NEMA 5-15 receptacle;

(FOR UK)
250 V AC, 13 AMP dedicated circuit using a BS 1363 receptacle.

ELECTRICAL RECEPTACLE MUST BE LOCATED WITHIN 1,5 m OF THE MACHINE.

Plumbing requirements : Cold water source with a dedicated female 3/4" fitting and an in-line shut-off valve.

Water supply pressure must be MIN 1 bar (14,5 PSI) and MAX 6 bar (87 PSI).

WATER LINE MUST BE LOCATED WITHIN 1,5 m OF THE MACHINE.
If your location has a reverse osmosis system, a fresh water bypass is required.

Room temperature : cannot exceed 32 °C (90 °F).

Drain system requirements :

It's important that the drain hose has a continuous rate of fall.
Minimum rate of fall required is one inch per foot (85 millimeters per meter).
Internal diameter of the tube junction on the machine 19,5mm.
Internal diameter of the tube junction on the drain 21mm.

