



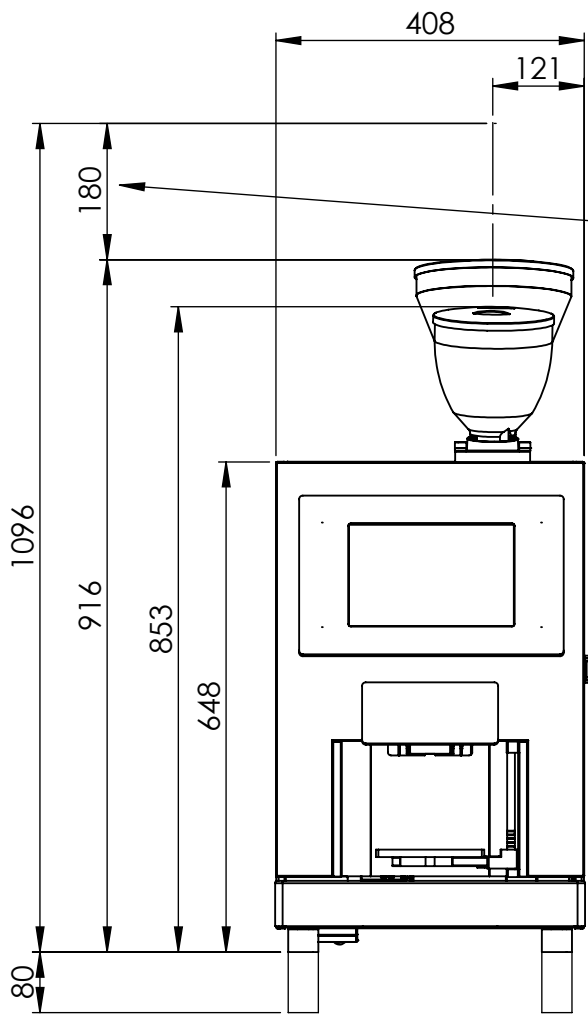


NEED ADDITIONAL SPACE
FOR POURING BEANS OR
FOR BEAN HOPPER
REMOVAL

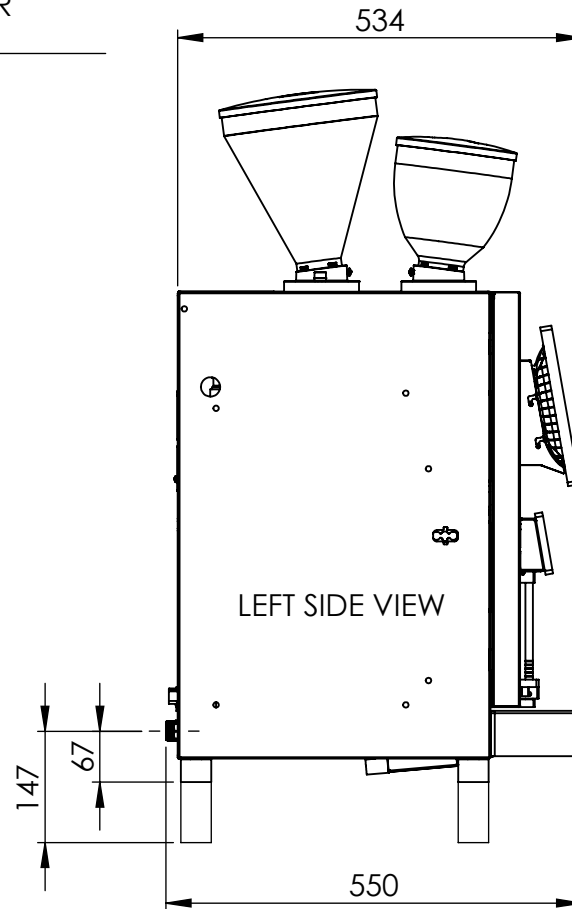


LEFT SIDE VIEW

SERVICE HOLE THROUGH COUNTER
TOP FOR DRAIN HOSE, POWERED CORD
AND WATER CONNECTION

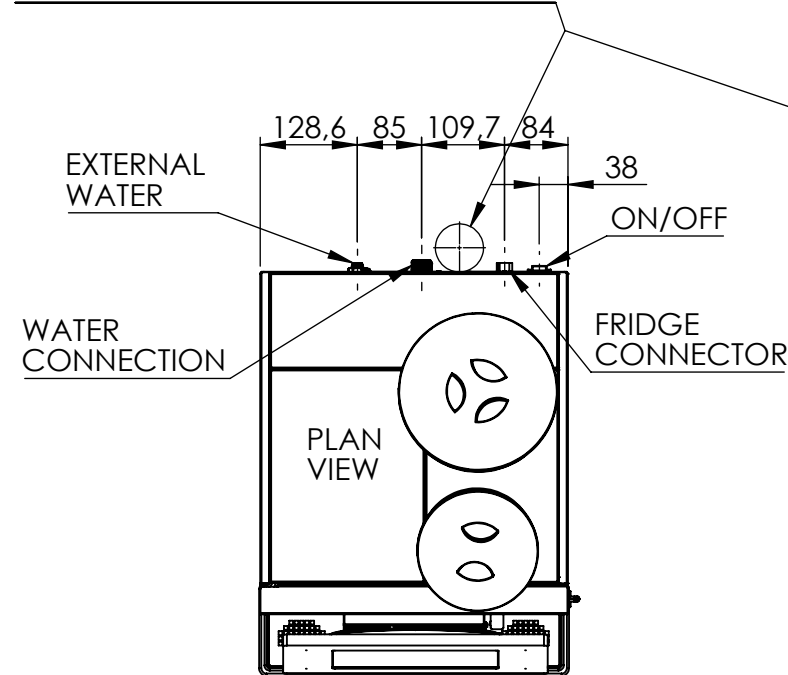

MINIMUM SPACE NEEDED
FOR SITE INSTALLATION

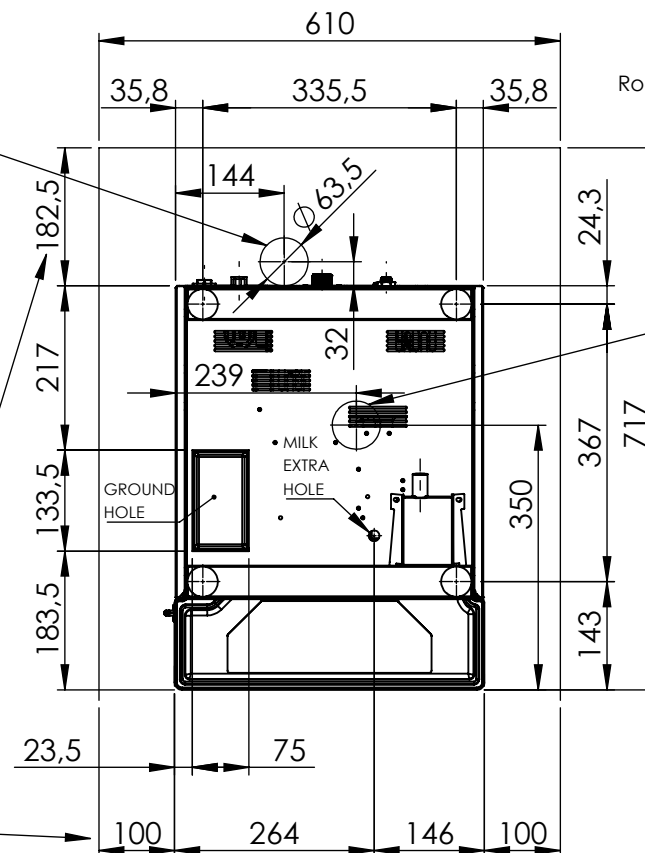

BOTTOM VIEW

Physical site requirements : model HLF 3700R

HEIGHT 1176 mm INCLUDES 110 mm LEGS: IT'S POSSIBLE TO HAVE DIFFERENT LEGS HEIGHT.

Countertop space : 610 mm (Width), 717 mm (Depth), 1176 mm (Height)

(Machine Only);

additional 260 mm (Width) with Milk fridge on the left / right side;

additional 260 mm (Width) with Cup warmer on the left / right side;

additional 460 mm (Width) with Cash box on the left side;

A DRAIN HOSE ACCESS HOLE IN THE COUNTER TOP MAY BE
REQUIRED;

Countertop must be able to support : 70 Kg (Machine Only);

additional 27 Kg with Milk fridge on the right side;

additional 20 Kg with Cup warmer on the left side;

additional 15 Kg with Cash box on the left side;

Power requirements : (FOR EU)

250 V AC, 10 AMP dedicated circuit using a SHUKO receptacle.

(FOR AU)

230 V AC, 10 AMP dedicated circuit using an AS 3112 receptacle.

(FOR US)

125 V AC, 15 AMP dedicated circuit using a NEMA 5-15 receptacle;

(FOR UK)

250 V AC, 13 AMP dedicated circuit using a BS 1363 receptacle.

ELECTRICAL RECEPTACLE MUST BE LOCATED WITHIN 1,5 m
OF THE MACHINE.


Plumbing requirements : Cold water source with a dedicated female 3/4" fitting and an in-line shut-off
valve.

Water supply pressure must be MIN 1 bar (14,5 PSI) and MAX 6 bar (87 PSI).

WATER LINE MUST BE LOCATED WITHIN 1,5 m OF THE MACHINE.

If your location has a reverse osmosis system, a fresh water
bypass is required.

Room temperature : cannot exceed 32 °C (90 °F).

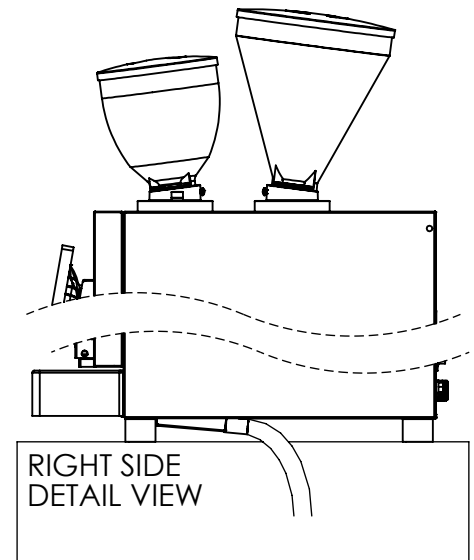

RIGHT SIDE
DETAIL VIEW

COUNTERTOP
FOOTPRINT

02	--	--	-	-	-
01	--	--	-	-	-
N°	Pos.	Descrizione Modifica	Disegnato	Approvato	Data

IL PARTICOLARE DEVE ESSERE CONFORME ALLA DIRETTIVA 2002/95/CE (RoHS) E ALLE DIRETTIVE EN 60335-1 E 60335-2-75, AD ECCEZIONE DEI COMPONENTI 120 VAC (UL)					Specifiche di Fornitura HLF : --		
Tolleranze generali per grandezze lineari ed angolari prive di indicazioni di tolleranze specifiche : UNI EN 22768/1 - m Tolleranze geometriche per elementi privi di indicazione di indicazione di tolleranze specifiche : UNI EN22768/2 - k							
Stato : DEFINITIVO VALIDO PER PRODUZIONE E/O ACQUISTO	Mod. Rif :	Note	Peso (Kg) :	Disegnato :	Controllato :	Approvato :	Viste :
	3700R	--	70	Bernardel L.	--	--	Foglio : A3
	Finitura : --			Data : 15/05/2021	Data : --	Data : --	Scala : 1:10
	Materiale : --				Ricavato da : --		Sostituisce il : --
HLF ITALIAN DESIGN	Denominazione : PLANNING DIAGRAM 3700R(METRIC)				COD. Articolo : --		Rev. 00

HLF S.r.l. si riserva a termini di Legge la proprietà del presente documento, con divieto di divulgazione e/o riproduzione, anche parziale, salvo sua autorizzazione scritta

Piegatura	_____
Piegatura contraria	-----
Senso di Satinatura	←-----→
Satinatura opposta	←-----→
Punto attacco laser	*
Superficie in vista	-----
Quota sotto controllo	
LEGENDA	

Drain system requirements:
-It's important that the drain
hose has a continuous rate of fall.
-Minimum rate of fall required is one
inch for foot(85mm per meter)
-Internal diameter of the tube junction
on the machine 19,5mm.
-Internal diameter of the tube junction
on the drain 21mm.