REVISIONE	DESCRIZIONE	DATA
Χ	XX	/2018
X	xx	/2018





_	
	19/06/2018


PLANNING	BDIAGRAM	
	DISEGNATORE BERNARDEL L.	SCALA 1:12


HLF S.r.I. si riserva, a termini di legge, la proprietà del presente disegno e ne vieta la riproduzione o la copia, senza su autorizzazione scritta

9BPM17G21 0







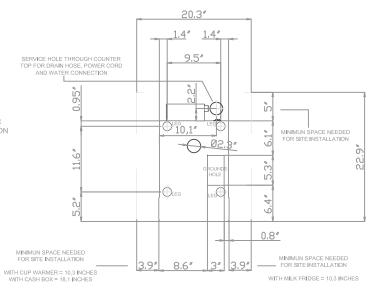

Physical site requirements: model HLF 1700

HEIGTH 33,45 inches INCLUDES 4,4 inches LEGS; IT'S POSSIBILE TO HAVE DIFFERENT LEGS

Countertop space: 20,3 Inches (Wldth), 22,9 Inches (Depth), 33,45 Inches (Helgth) (Machine Only);

additional 10,3 inches (Width) with Milk fridge on the rigth side; additional 10,3 inches (Width) with Cup warmer on the left side; additional 18,1 inches (Width) with Cash box on the left side;

A DRAIN HOSE ACCESS HOLE IN THE COUNTER TOP MAY BE

Countertop must be able to support: 66 lb (Machine Only); additional 60 lb with Milk fridge on the rigth side;

additional 44 lb with Cup warmer on the left side; additional 33 lb with Cash box on the left side;

Power requirements: (FOR EU)

250 V AC, 16 AMP dedicated circuit using a SHUKO receptacle.

230 V AC, 10 AMP dedicated circuit using an AS 3112 receptacle.

125 V AC, 15 AMP dedicated circuit using a NEMA 5-15 receptacle;

250 V AC, 13 AMP dedicated circuit using a BS 1363 receptacle.

ELECTRICAL RECEPTACLE MUST BE LOCATED WITHIN 1,5 m OF THE MACHINE.

Plumbing requirements: Cold water source with a dedicated female 3/4" fitting and an in-line shut-off

Water supply pressure must be MIN 1 bar (14,5 PSI) and MAX 6 bar (87 PSI).

WATER LINE MUST BE LOCATED WITHIN 1,5 m OF THE MACHINE. If your location has a reverse osmosis system, a fresh water

Room temperature: cannot exceed 32 °C (90 °F).

Drain system requirements :

It's Important that the drain hose has a continuos rate of fall.

Minimun rate of fall required is one inch per foot (85 millimiters per meter).

